



Temposonics

AN AMPHENOL COMPANY

Data Sheet

R-Series V RDV PROFINET

Magnetostrictive Linear Position Sensors

- Space-saving installation due to detached sensor electronics housing
- Backwards compatible with RD4 generation
- All advantages of the R-Series V



THE NEW **V** GENERATION

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Tempsonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and a supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.


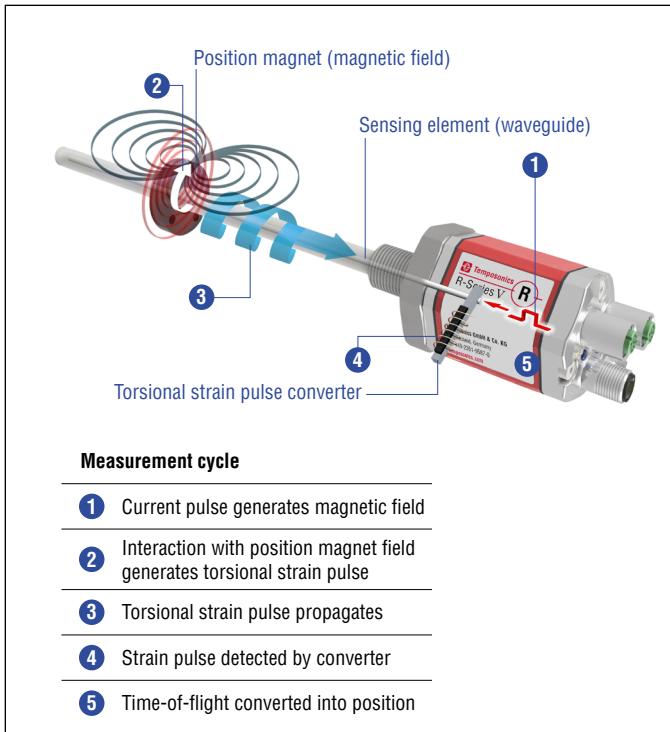


Fig. 1: Time-of-flight based magnetostrictive position sensing principle


R-SERIES V RDV PROFINET

The Tempsonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The sensor RDV is the version of the R-Series V with a detached sensor electronics. The main advantages of the version RDV are:




Space-saving installation

The detached sensor electronics allow space-saving installation of the compact measuring rod.




R-Series V platform

The detached sensor electronics is based on the R-Series V and offers all advantages of the innovative series.



Backwards compatible

Mechanically and electrically, the sensors are backwards compatible with the RD4. This means that the sensor rod or the sensor electronics can be replaced without any problems.



Protection of the sensor electronics

By separating the robust sensor rod from the complex evaluation electronics improved protection against process influences can be realized.

In addition the R-Series V PROFINET scores with the following features:



30 positions simultaneously

The R-Series V PROFINET can detect and report the position and velocity of up to 30 magnets simultaneously.



R-Series V PROFINET

In addition to the measured position value via the PROFINET protocol further data about the current sensor status, such as the total distance travelled, the internal temperature and the total operating hours, can be displayed for diagnostic purposes.

All settings under control with the smart assistants for the R-Series V

The TempoLink® and the TempoGate® smart assistants support you in setup and diagnostics of the R-Series V. For more information of these assistants please see the data sheets:

- TempoLink® smart assistant (Document part number: [552070](#))
- TempoGate® smart assistant (Document part number: [552110](#))



TECHNICAL DATA

Output					
Interface	PROFINET RT PROFINET IRT version 2.3				
Data protocol	Linear profile and encoder profile V4.2				
Data transmission rate	100 MBit/s (maximum)				
Measured value	Position, velocity/option: Simultaneous multi-position and multi-velocity measurements up to 30 magnets				
Measurement parameters					
Resolution: Position	0.5...100 µm (selectable)				
Cycle time	Stroke length	≤ 715 mm	≤ 2000 mm	≤ 4675 mm	≤ 5080 mm
	Cycle time	500 µs	1000 µs	2000 µs	4000 µs
Linearity deviation ^{1,2}	Stroke length	≤ 500 mm	> 500 mm		
	Linearity deviation	≤ ±50 µm	< 0.01 % F.S.		
	Optional internal linearization: Linearity tolerance (applies for the first magnet for multi-position measurement)				
	Stroke length	25...300 mm	300...600 mm	600...1200 mm	
	typical	±15 µm	±20 µm	±25 µm	
	maximum	±25 µm	±30 µm	±50 µm	
Repeatability	< ±0.001 % F.S. (minimum ±2.5 µm) typical				
Hysteresis	< 4 µm typical				
Temperature coefficient	< 15 ppm/K typical				
Operating conditions					
Operating temperature	-40...+85 °C (-40...+185 °F)				
Humidity	90 % relative humidity, no condensation				
Ingress protection	Sensor electronics: IP67 (with correctly mounted housing and connectors) Measuring rod with connecting cable for side cable entry: IP65 Measuring rod with single wires and flat connector with bottom cable entry: IP30				
Shock test	100 g/11 ms, IEC standard 60068-2-27				
Vibration test	10 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)				
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The RDV sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR CU 020/2011 under the condition of an EMC compliant installation ³				
Operating pressure	350 bar (5076 psi)/700 bar (10,153 psi) peak (at 10 × 1 min) for sensor rod				
Magnet movement velocity	Any				
Design/Material					
Sensor electronics housing	Aluminum (painted), zinc die cast				
Sensor rod with flange	Stainless steel 1.4301 (AISI 304)				
RoHS compliance	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622				
Stroke length	25...2540 mm (1...100 in.) for pressure-fit flange »S« 25...5080 mm (1...200 in.) for all threaded flanges				
Mechanical mounting					
Mounting position	Any				
Mounting instruction	Please consult the technical drawings on page 5 and page 7 and the operation manual (document number: 551973)				

Technical data "Electrical connection" on [page 4](#)

1/ With position magnet # 251 416-2

2/ For rod style »S« the linearity deviation can be higher in the first 30 mm (1.2 in.) of stroke length

3/ The cable between the sensor element and the sensor electronics housing must be mounted in an appropriately shielded environment


Electrical connection

Connection type	2 × M12 female connectors (5 pin), 1 × M12 male connector (4 pin) or 2 × M12 female connectors (5 pin), 1 × M8 male connector (4 pin)
Operating voltage	+12...30 VDC ±20 % (9.6...36 VDC)
Power consumption	Less than 4 W typical
Dielectric strength	500 VDC (DC ground to machine ground)
Polarity protection	Up to -36 VDC
Overvoltage protection	Up to 36 VDC


TECHNICAL DRAWING

RDV with bottom cable entry

- The connecting cables between the sensor electronics housing and the rod are routed into the interior via the bottom of the sensor electronics housing
- Rod and connecting cable are fully encapsulated and protected against external disturbances

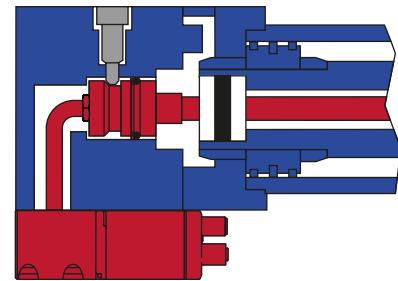

RDV with bottom cable entry, example: Connector D56 (connector outlet)

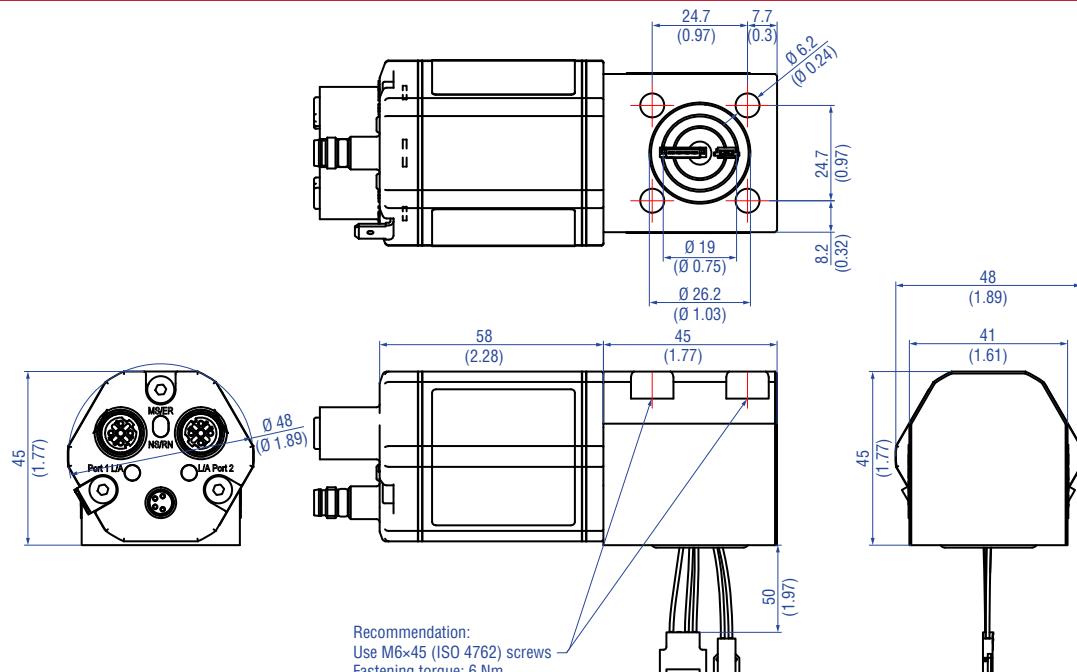


Controlling design dimensions are in millimeters and measurements in () are in inches

Fig. 2: Tempsonics® RDV sensor electronics housing with bottom cable entry

RDV with side connection

- The connecting cable between the sensor electronics housing and the rod is connected to the side of the sensor electronics housing
- Rod and connecting cable are sealed against dust and protected against water jets

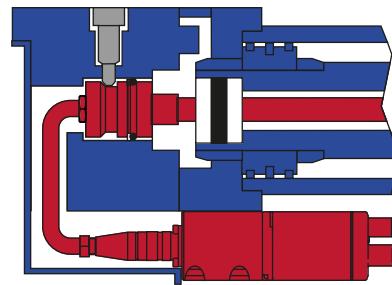

RDV with side cable entry, example: Connector D58 (connector outlet)

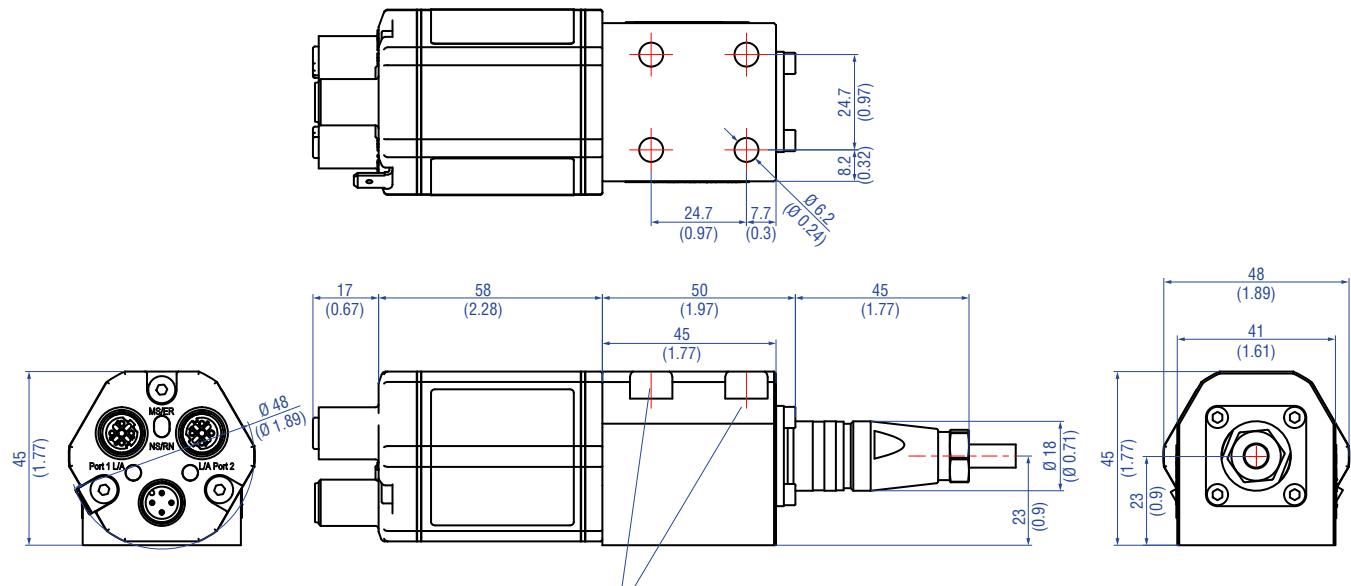
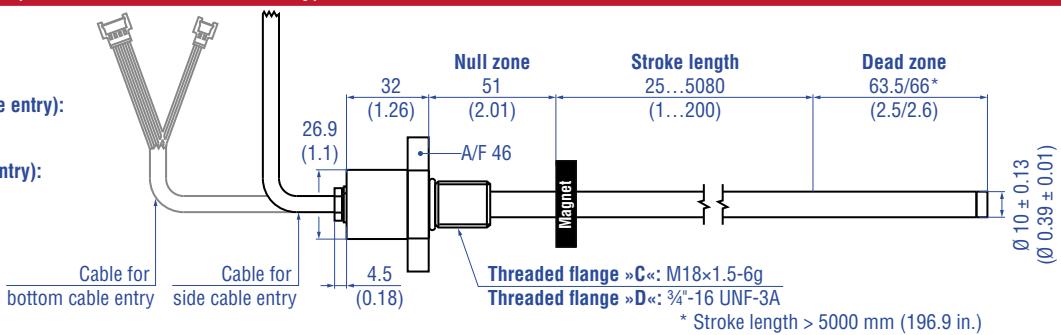



Fig. 3: Tempsonics® RDV sensor electronics housing with side cable entry

Threaded flange »C« & »D« (for bottom or side cable entry)


PUR cable:
 $\varnothing 6$ (0.24)
Bending radius:
 > 24 (> 0.94)
Cable length (bottom cable entry):
 $65/170/230/350$
 $(2.6/6.7/9.1/13.8)$
Cable length (side cable entry):
 $250/400/600$
 $(9.8/15.7/23.6)$

**Threaded flange »M« (for bottom or side cable entry)**


PUR cable:
 $\varnothing 6$ (0.24)
Bending radius:
 > 24 (> 0.94)
Cable length (bottom cable entry):
 $65/170/230/350$
 $(2.6/6.7/9.1/13.8)$
Cable length (side cable entry):
 $250/400/600$
 $(9.8/15.7/23.6)$

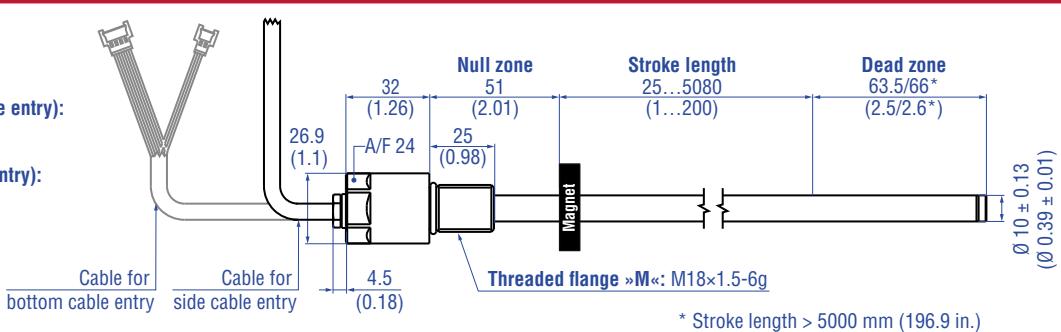**Threaded flange »T« (for bottom or side cable entry)**

PUR cable:
 $\varnothing 6$ (0.24)
Bending radius:
 > 24 (> 0.94)
Cable length (bottom cable entry):
 $65/170/230/350$
 $(2.6/6.7/9.1/13.8)$
Cable length (side cable entry):
 $250/400/600$
 $(9.8/15.7/23.6)$

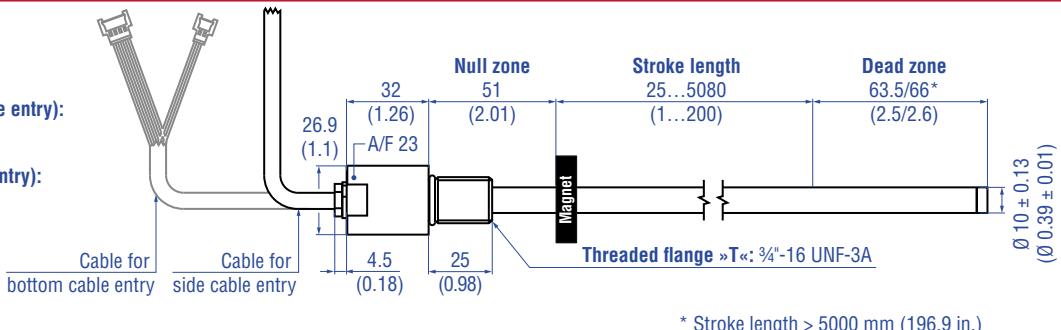**Pressure fit flange »S« (for bottom or side cable entry)**

PUR cable:
 $\varnothing 6$ (0.24)
Bending radius:
 > 24 (> 0.94)
Cable length (bottom cable entry):
 $65/170/230/350$
 $(2.6/6.7/9.1/13.8)$
Cable length (side cable entry):
 $250/400/600$
 $(9.8/15.7/23.6)$

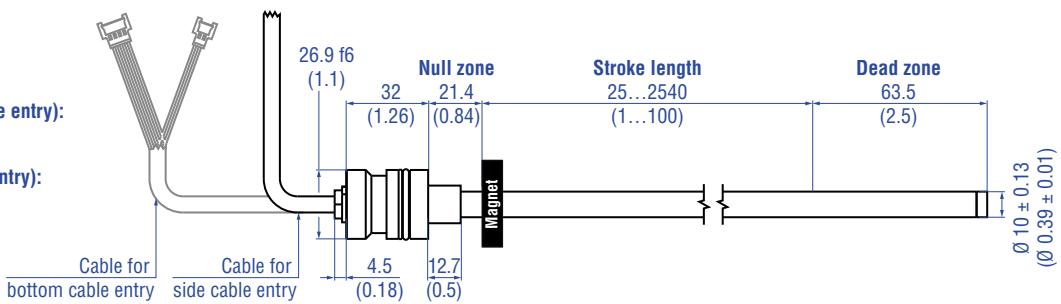

Controlling design dimensions are in millimeters and measurements in () are in inches

Fig. 4: Tempsonics® RDV flange types

CONNECTOR WIRING

D58		
Port 1 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
View on sensor	4	Rx (-)
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
View on sensor	4	Rx (-)
Power supply		
M12 male connector (A-coded)	Pin	Function
	1	+12...30 VDC ($\pm 20\%$)
	2	Not connected
	3	DC Ground (0 V)
View on sensor	4	Not connected

Fig. 5: Connector wiring D58


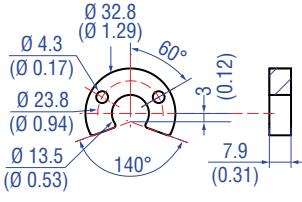
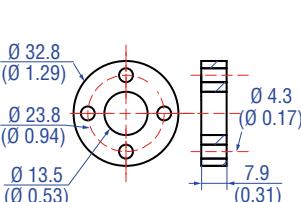
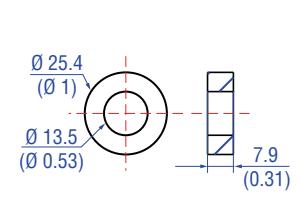
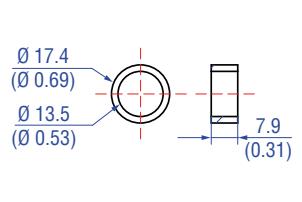
D56		
Port 1 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
View on sensor	4	Rx (-)
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
	3	Tx (-)
View on sensor	4	Rx (-)
Power supply		
M8 male connector	Pin	Function
	1	+12...30 VDC ($\pm 20\%$)
	2	Not connected
	3	DC Ground (0 V)
View on sensor	4	Not connected





Fig. 6: Connector wiring D56

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Catalog](#)  551444





Position magnets

			
U-magnet OD33 Part no. 251 416-2	Ring magnet OD33 Part no. 201 542-2	Ring magnet OD25.4 Part no. 400 533	Ring magnet OD17.4 Part no. 401 032
<p>Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p> <p>Marked version for sensors with internal linearization: Part no. 254 226</p>	<p>Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)</p> <p>Marked version for sensors with internal linearization: Part no. 253 620</p>	<p>Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm² Operating temperature: -40...+105 °C (-40...+221 °F)</p> <p>Marked version for sensors with internal linearization: Part no. 253 621</p>	<p>Material: PA neobond Weight: Approx. 5 g Surface pressure: Max. 20 N/mm² Operating temperature: -40...+105 °C (-40...+221 °F)</p>

Magnet spacer

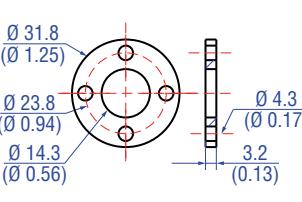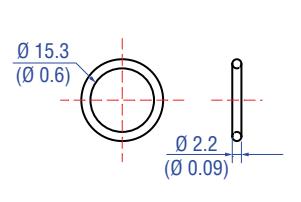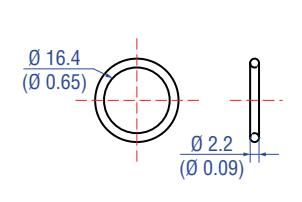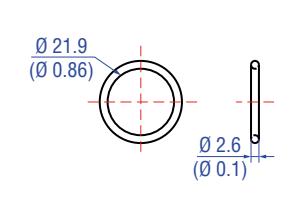
			
Magnet spacer Part no. 400 633	O-ring for threaded flange M18x1.5-6g Part no. 401 133	O-ring for threaded flange 3/4"-16 UNF-3A Part no. 560 315	O-ring for pressure fit flange Ø 26.9 mm Part no. 560 705
<p>Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm</p>	<p>Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>	<p>Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)</p>	<p>Material: Nitrile rubber Operating temperature: -53...+107 °C (-65...+225 °F)</p>

O-rings

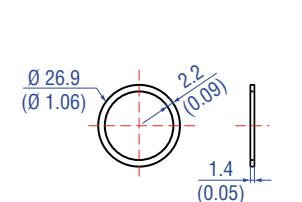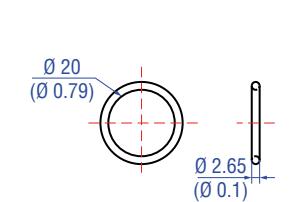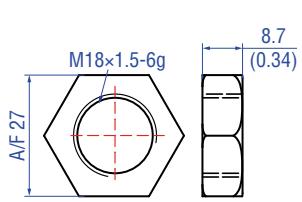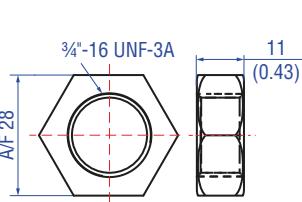			
Back-up ring for pressure fit flange Ø 26.9 mm Part no. 560 629	O-ring for mounting block with bottom entry Part no. 561 435	Hex jam nut M18x1.5-6g Part no. 500 018	Hex jam nut 3/4"-16 UNF-3A Part no. 500 015
<p>Material: Polymyte Durometer: 90 Shore A</p>	<p>Material: FKM Durometer: 80± 5 Shore A Operating temperature: -15...+200 °C (5...+392 °F)</p>	<p>Material: Steel, zinc plated</p>	<p>Material: Steel, zinc plated</p>

Controlling design dimensions are in millimeters and measurements in () are in inches

Mounting accessories

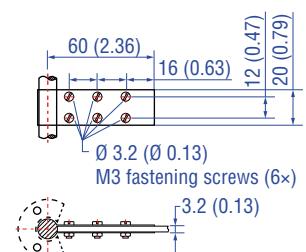

Fixing clip


Part no. 561 481

Application: Used to secure sensor rods (\varnothing 10 mm (\varnothing 0.39 in.)) when using an U-magnet or block magnet

Material: Brass, non-magnetic


Controlling design dimensions are in millimeters and measurements in () are in inches

Cable connectors* – Signal



M12 D-coded male connector (4 pin), straight
Part no. 370 523


Material: Zinc nickel-plated
Termination: Insulation-displacement
Cable Ø: 5.5...7.2 mm (0.2...0.28 in.)
Wire: 24 AWG – 22 AWG
Operating temperature:
-25...+85 °C (-13...+185 °F)
Ingress protection: IP65 / IP67
(correctly fitted)
Fastening torque: 0.6 Nm



M12 connector end cap
Part no. 370 537


Female connectors M12 should be covered by this protective cap
Material: Brass nickel-plated
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.39...0.49 Nm

Cable connectors* – Power

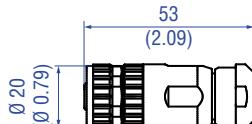

M12 A-coded female connector (4 pin/5 pin), straight
Part no. 370 677


Material: GD-Zn, Ni
Termination: Screw
Contact insert: CuZn
Cable Ø: 4...8 mm (0.16...0.31 in.)
Wire: 1.5 mm²
Operating temperature:
-30...+85 °C (-22...+185 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.6 Nm



M8 female connector (4 pin), straight
Part no. 370 504

Material: CuZn nickel plated
Termination: Solder
Cable Ø: 3.5...5 mm (0.14...0.28 in.)
Wire: 0.25 mm²
Operating temperature:
-40...+85 °C (-40...+185 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.5 Nm

Cables

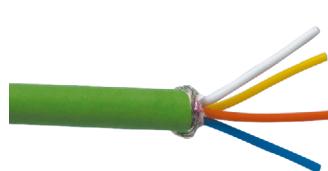

PUR signal cable
Part no. 530 125

Material: PUR jacket; green
Features: Cat 5, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant
Cable Ø: 6.5 mm (0.26 in.)
Cross section: 2 x 2 x 0.35 mm² (22 AWG)
Bending radius: 5 x D (fixed installation)
Operating temperature:
-20...+60 °C (-4...+140 °F)



PVC power cable
Part no. 530 108

Material: PVC jacket; gray
Features: Shielded, flexible, mostly flame resistant
Cable Ø: 4.9 mm (0.19 in.)
Cross section: 3 x 0.34 mm²
Bending radius: 5 x D (fixed installation)
Operating temperature:
-30...+80 °C (-22...+176 °F)

Cable sets



Signal cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight
Part no. 530 064

Material: PUR jacket; green
Features: Cat 5e
Cable length: 5 m (16.4 ft)
Cable Ø: 6.5 mm (0.26 in.)
Ingress protection: IP65, IP67, IP68 (correctly fitted)
Operating temperature:
-30...+70 °C (-22...+158 °F)



Signal cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight
Part no. 530 065

Material: PUR jacket; green
Features: Cat 5e
Cable length: 5 m (16.4 ft)
Cable Ø: 6.5 mm (0.26 in.)
Ingress protection M12 connector:
IP67 (correctly fitted)
Ingress protection RJ45 connector:
IP20 (correctly fitted)
Operating temperature:
-30...+70 °C (-22...+158 °F)

*/ Follow the manufacturer's mounting instructions

Controlling design dimensions are in millimeters and measurements in () are in inches

Color of connectors and cable jacket may change. Colors of the cores and technical properties remain unchanged.

Cable sets	Programming tools		
			
<p>Power cable with M8 female connector (4 pin), straight – pigtail Part no. 530 066 (5 m (16.4 ft.)) Part no. 530 096 (10 m (32.8 ft.)) Part no. 530 093 (15 m (49.2 ft.))</p> <p>Material: PUR jacket; gray Features: Shielded Cable Ø: 5 mm (0.2 in.) Operating temperature: -40...+90 °C (-40...+194 °F)</p>	<p>Power cable with M12 A-coded female connector (5 pin), straight – pigtail Part no. 370 673</p> <p>Material: PUR jacket; black Features: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)</p>	<p>TempoLink® kit for Temposonics® R-Series V Part no. TL-1-0-EM08 (D56) Part no. TL-1-0-EM12 (D58)</p> <ul style="list-style-type: none"> • Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool • Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m) • User friendly interface for mobile devices and desktop computers • See data sheet "TempoLink® smart assistant" (document part no.: 552070) for further information 	<p>TempoGate® smart assistant for Temposonics® R-Series V Part no. TG-C-0-Dxx (xx indicates the number of R-Series V sensors that can be connected (even numbers only))</p> <ul style="list-style-type: none"> • OPC UA server for diagnostics of the R-Series V • For installation in the control cabinet • Connection via LAN and Wi-Fi • See data sheet "TempoGate® smart assistant" document part no.: 552110 for further information

Color of connectors and cable jacket may change. Colors of the cores and technical properties remain unchanged.

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
R	D	V										D	5		1	U	4		
a	b	c	d	e	f	g	h												

a Design	e Number of magnets
R D V Detached sensor electronics "Classic"	X X 01...30 position(s) (1...30 magnet(s))
b Design	f Connection type
C Threaded flange M18x1.5-6g (A/F 46)	D 5 8 2×M12 female connectors (D-coded), 1×M12 male connector (A-coded)
D Threaded flange 3/4"-16 UNF-3A (A/F 46)	D 5 6 2×M12 female connectors (D-coded), 1×M8 male connector
M Threaded flange M18x1.5-6g (A/F 24)	
S Pressure fit flange Ø 26.9 mm f6	
T Threaded flange 3/4"-16 UNF-3A (A/F 23)	
c Mechanical options	g System
For side cable entry	1 Standard
A PUR cable with M16 connector, 250 mm length	h Output
B PUR cable with M16 connector, 400 mm length	U 4 0 2 PROFINET RT & IRT, position and velocity, linear profile (1...30 magnet(s))
C PUR cable with M16 connector, 600 mm length	U 4 0 1 PROFINET RT & IRT, position and velocity, encoder profile (1 magnet)
For bottom cable entry	U 4 1 2 PROFINET RT & IRT, position and velocity, linear profile, internal linearization (1...30 magnet(s))
2 Single wires with flat connector, 65 mm length	U 4 1 1 PROFINET RT & IRT, position and velocity, encoder profile, internal linearization (1 magnet)
4 Single wires with flat connector, 170 mm length	
5 Single wires with flat connector, 230 mm length	
6 Single wires with flat connector, 350 mm length	
d Stroke length	NOTICE
X X X X M Flange »S«: 0025...2540 mm	<ul style="list-style-type: none"> Select the linear profile (U402) in h "Output" for multi-position measurement.
Flange »C«, »D«, »M«, »T«: 0025...5080 mm	<ul style="list-style-type: none"> Specify number of magnets for your application and order the magnets separately.
Stroke length (mm)	Ordering steps
25... 500 mm	5 mm
500... 750 mm	10 mm
750...1000 mm	25 mm
1000...2500 mm	50 mm
2500...5080 mm	100 mm
X X X X U Flange »S«: 001.0...100.0 in.	<ul style="list-style-type: none"> The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.).
Flange »C«, »D«, »M«, »T«: 001.0...200.0 in.	<ul style="list-style-type: none"> Use magnets of the same type for multi-position measurement. If the option for internal linearization (U411, U412) in h "Output" is chosen, select a suitable magnet.
Stroke length (in.)	Ordering steps
1... 20 in.	0.2 in.
20... 30 in.	0.4 in.
30... 40 in.	1.0 in.
40...100 in.	2.0 in.
100...200 in.	4.0 in.
Non standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments	
RDV-C/-D/-M/-T: Sensor, O-ring	Accessories have to be ordered separately.
RDV-S: Sensor, O-ring, back-up ring	
Manuals, Software & 3D Models available at: www.temposonics.com	

GLOSSARY

E

Encoder Profile

The encoder profile corresponds to the specification of the encoder profile V4.2 (PNO no. 3.162). With this profile, the position and the velocity of one magnet can be measured and transferred simultaneously. (→ Linear Profile)

Extrapolation

The native measurement cycle time of a sensor increases with the stroke length. With extrapolation, the sensor is able to report data faster than the native cycle time, independent of the stroke length of the sensor. Without extrapolation, if data is requested faster than the native cycle time, the last measured value is repeated.

G

GSDML

The properties and functions of a PROFINET IO field device are described in a GSDML file (**G**eneral **S**tation **D**escription). The XML-based GSDML file contains all relevant data that are important for the implementation of the device in the controller as well as for data exchange during operation. The GSDML file of the R-Series V PROFINET is available on the homepage www.temposonics.com.

I

Internal Linearization

The internal linearization offers an improved linearity for an overall higher accuracy of the position measurement. The internal linearization is set for the sensor during production.

IRT Filter

With PROFINET IRT (Isochronous **R**eal **T**ime) a clock-synchronous data transmission takes place. The application, the data transmission as well as the device cycle are synchronous. IRT enables a clock-synchronous data exchange with a minimum cycle time of 250 µs in the network. The R-Series V PROFINET supports PROFINET RT and IRT. (→ RT)

L

Linear Profile

The linear profile was developed by Temposonics and is tailored to the characteristics of magnetostrictive position sensors. With this profile, the positions and velocities of up to 30 magnets can be reported and transferred simultaneously. (→ Encoder Profile)

M

Multi-position measurement

During the measurement cycle, the positions of every magnet on the sensor are simultaneously reported. The velocity is continuously calculated based on these changing position values as the magnets are moved.

P

PROFINET

PROFINET (**P**rocess **F**ield **N**etwork) is an Industrial Ethernet interface and is managed by the **P**ROFIBUS **N**utzer**o**rganisation e.V. (PNO). The R-Series V PROFINET and its corresponding GSDML file are certitified by the PNO.

R

RT

With PROFINET RT (**R**eal **T**ime) the data exchange is without clock synchronization. In this case, the application, the data transmission and the field devices operate according to their own processing cycle. The R-Series V PROFINET supports PROFINET RT and IRT. (→ IRT)



Temposonics

AN AMPHENOL COMPANY

UNITED STATES 3001 Sheldon Drive
Temposonics, LLC Cary, N.C. 27513
Americas & APAC Region Phone: +1 919 677-0100
E-mail: info.us@tempsonics.com

GERMANY Auf dem Schüffel 9
Temposonics 58513 Lüdenscheid
GmbH & Co. KG Phone: +49 2351 9587-0
EMEA Region & India E-mail: info.de@tempsonics.com

ITALY Phone: +39 030 988 3819
Branch Office E-mail: info.it@tempsonics.com

FRANCE Phone: +33 6 14 060 728
Branch Office E-mail: info.fr@tempsonics.com

UK Phone: +44 79 21 83 05 86
Branch Office E-mail: info.uk@tempsonics.com

SCANDINAVIA Phone: +46 70 29 91 281
Branch Office E-mail: info.sca@tempsonics.com

CHINA Phone: +86 21 3405 7850
Branch Office E-mail: info.cn@tempsonics.com

JAPAN Phone: +81 3 6416 1063
Branch Office E-mail: info.jp@tempsonics.com

Document Part Number:
552139 Revision B (EN) 02/2026



tempsonics.com