



Temposonics

AN AMPHENOL COMPANY

Data Sheet

NEW!
Also with flexible
sensing element
for easy replacement

R-Series V RH5 PROFINET IO RT & IRT

Magnetostrictive Linear Position Sensors

- Position measurement with a resolution up to 0.5 µm
- Position and velocity measurements for up to 30 magnets
- Field adjustments and diagnostics using the TempoLink® and TempoGate® smart assistants



THE NEW **V** GENERATION

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Tempsonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.


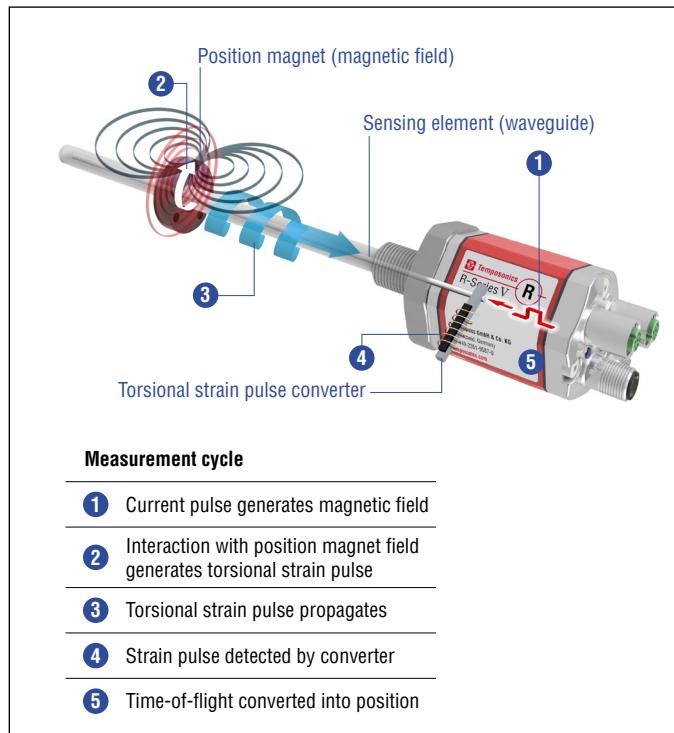


Fig. 1: Time-of-flight based magnetostrictive position sensing principle


R-SERIES V RH5 PROFINET

The Tempsonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The main advantages of the rod version RH5 with PROFINET output are:




High shock and vibration resistance

The R-Series V is the long term solution for harsh environments that have high levels of shock and vibration.




Minimum resolution 0.5 µm

The sensor is characterized by a very stable position signal with a minimum resolution of 0.5 µm.




Synchronous measurement

The sensor is available with PROFINET RT and IRT. PROFINET IRT offers a synchronized communication with a minimum cycle time of 250 µs.



Extrapolation


The sensor supports linear extrapolation. This enables synchronized controller communication at a cycle time of 250 µs for any stroke length of the sensor.



Internal linearization


The sensor is available with internal linearization which offers improved linearity for overall higher accuracy of the position measurement value.

In addition the R-Series V PROFINET scores with the following features:



30 positions simultaneously

The R-Series V PROFINET can detect and report the position and velocity of up to 30 magnets simultaneously.



R-Series V PROFINET

In addition to the measured position value via the PROFINET protocol further data about the current sensor status, such as the total distance travelled, the internal temperature and the total operating hours, can be displayed for diagnostic purposes.

All settings under control with the smart assistants for the R-Series V
The TempoLink® and the TempoGate® smart assistants support you in setup and diagnostics of the R-Series V. For more information of these assistants please see the data sheets:

- TempoLink® smart assistant
(Document part number: [552070](#))
- TempoGate® smart assistant
(Document part number: [552110](#))



RH5 WITH RIGID OR FLEXIBLE SENSING ELEMENT - YOU DECIDE


With the RH5, you can replace the base unit when the sensor is installed in the cylinder without opening the hydraulic circuit. This is possible as the flange with the pressure tube remains in the cylinder. You decide whether the base unit of the RH5 has a rigid or a flexible sensing element:

- RH5 with rigid sensor element: RH5-B/J/M/S/T-A/B/M/V
- RH5 with flexible sensing element: RH5-B/M/S/T-F


The advantages of the rod sensor with flexible sensing element RH5-B/M/S/T-F:

- Only a small amount of space is required when replacing the sensor as the sensing element can be bent
- It can be used as a replacement for an RH5 sensor with a rigid sensing element

Example: RH5-B/J/M/S/T-A/B/M/V
(rigid sensing element)

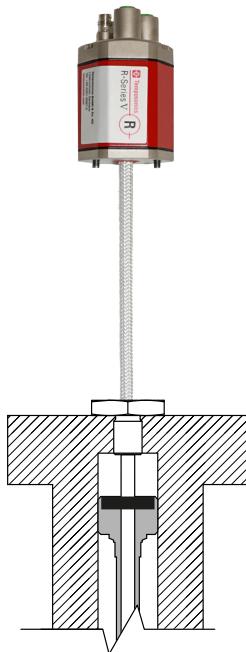

Example: RH5-B/M/S/T-F
(flexible sensing element)

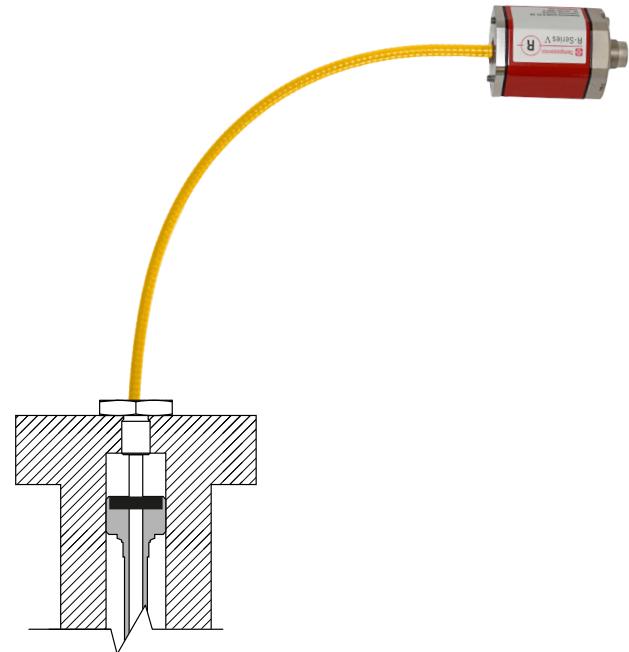

TECHNICAL DATA

Output						
Interface	PROFINET RT PROFINET IRT version 2.3					
Data protocol	Linear profile and encoder profile V4.2					
Data transmission rate	100 Mbit/s (maximum)					
Measured value	Position, velocity/option: Simultaneous multi-position and multi-velocity measurements up to 30 magnets					
Measurement parameters						
Resolution: Position	0.5...100 µm (selectable)					
Cycle time ¹	Stroke length	≤ 50 mm	≤ 715 mm	≤ 2000 mm	≤ 4675 mm	≤ 7620 mm
	Cycle time	250 µs	500 µs	1000 µs	2000 µs	4000 µs
Linearity deviation ²	Stroke length	≤ 500 mm	> 500 mm			
	Linearity deviation	≤ ±50 µm	< 0.01 % F.S.			
	Optional internal linearization: Linearity tolerance (applies for the first magnet for multi-position measurement)					
	Stroke length	25...300 mm	300...600 mm	600...1200 mm		
	typical	± 15 µm	± 20 µm	± 25 µm		
	maximum	± 25 µm	± 30 µm	± 50 µm		
Repeatability	< ±0.001 % F.S. (minimum ±2.5 µm) typical					
Hysteresis	< 4 µm typical					
Temperature coefficient	< 15 ppm/K typical					
Operating conditions						
Operating temperature	-40...+85 °C (-40...+185 °F)					
Humidity	90 % relative humidity, no condensation					
Ingress protection	IP67 (connectors correctly fitted)					
Shock test	150 g/11 ms, IEC standard 60068-2-27					
Vibration test	30 g/10...2000 Hz, IEC 60068-2-6 (excluding resonant frequencies)/ RH5-J: 15 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)					
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The RH5 sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR CU 020/2011					
Operating pressure	350 bar (5,076 psi)/700 bar (10,153 psi) peak (at 10 × 1 min) for sensor rod/RH5-J: 800 bar (11,603 psi)					
Magnet movement velocity	Any					
Design/Material						
Sensor electronics housing	Aluminum (painted), zinc die cast					
Sensor flange	Stainless steel 1.4305 (AISI 303)					
Sensor rod	Stainless steel 1.4306 (AISI 304L)/RH5-J: Stainless steel 1.4301 (AISI 304)					
RoHS compliance	The used materials are compliant with the requirements of EU directive 2011/65/EU and EU regulation 2015/863 as well as UKSI 2022 No. 622 with amendments					
Stroke length	25...7620 mm (1...300 in.)/RH5-J: 25...5900 mm (1...232 in.)					
Mechanical mounting						
Mounting position	Any					
Mounting instruction	Please consult the technical drawings on page 6 and the operation manual (document number: 551973)					

Technical data "Electrical connection" on [page 5](#)

1/ These values refer to a single position measurement.


2/ With position magnet # 251 416-2

Electrical connection


Connection type	2 × M12 female connectors (5 pin), 1 × M12 male connector (4 pin) or 2 × M12 female connectors (5 pin), 1 × M8 male connector (4 pin)
Operating voltage	+12...30 VDC ±20 % (9.6...36 VDC); the RH5 sensors must be power supplied via an external Class 2 power source in accordance with the UL approval
Power consumption	Less than 4 W typical
Dielectric strength	500 VDC (DC ground to machine ground)
Polarity protection	Up to -36 VDC
Overvoltage protection	Up to 36 VDC

TECHNICAL DRAWING


RH5-M/S-A/V – RH5 with threaded flange M18x1.5-6g or 3/4"-16 UNF-3A, example: Connection type D58 (connector outlet)

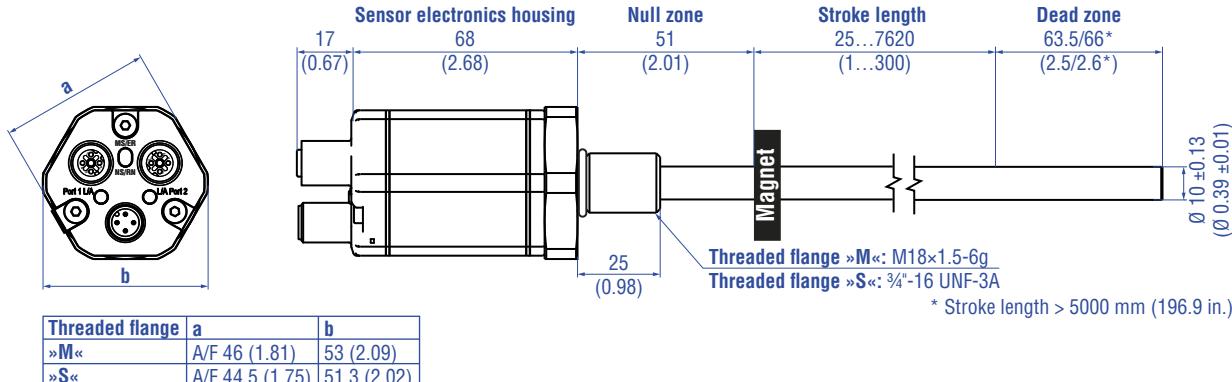


RH5-T-A/V – RH5 with threaded flange 3/4"-16 UNF-3A with raised-face, example: Connection type D56 (connector outlet)

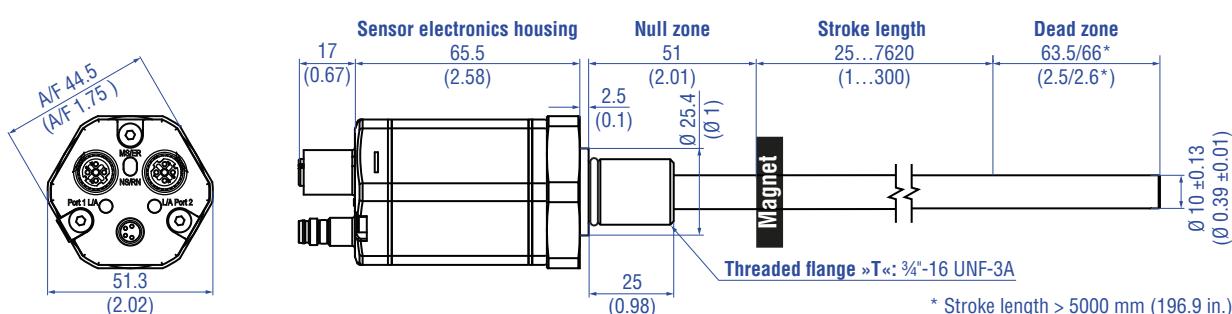

Mechanical option »B«: Bushing on rod end for threaded flange M18x1.5-6g or 3/4"-16 UNF-3A

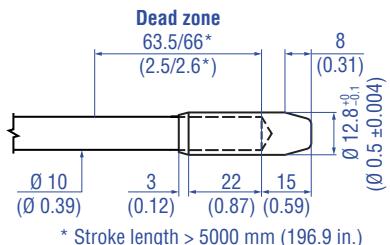


Mechanical option »M«: Thread M4 at rod end for threaded flange M18x1.5-6g or 3/4"-16 UNF-3A

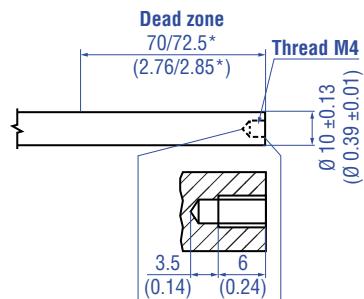

* Stroke length > 5000 mm (196.9 in.)

RH5-J-A/V – RH5 with threaded flange M22x1.5-6g and Ø 12.7 mm rod, example: Connection type D56 (connector outlet)

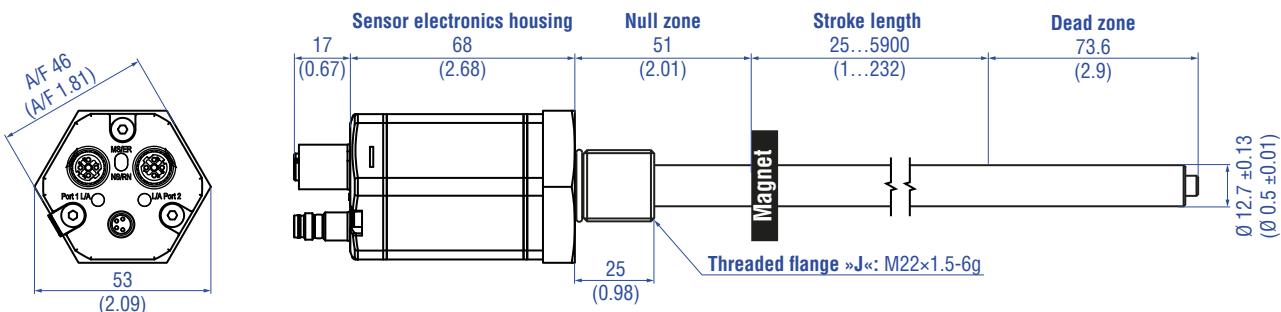

Controlling design dimensions are in millimeters and measurements in () are in inches

Fig. 2: Tempsonics® RH5 with ring magnet

CONNECTOR WIRING

D58			
Port 1 – Signal			
M12 female connector (D-coded)		Pin	Function
	1	Tx (+)	
	2	Rx (+)	
	3	Tx (-)	
	4	Rx (-)	
View on sensor			
Port 2 – Signal			
M12 female connector (D-coded)		Pin	Function
	1	Tx (+)	
	2	Rx (+)	
	3	Tx (-)	
	4	Rx (-)	
View on sensor			
Power supply			
M12 male connector (A-coded)		Pin	Function
	1	+12...30 VDC ($\pm 20\%$)	
	2	Not connected	
	3	DC Ground (0 V)	
	4	Not connected	
View on sensor			

Fig. 3: Connector wiring D58






D56			
Port 1 – Signal			
M12 female connector (D-coded)		Pin	Function
	1	Tx (+)	
	2	Rx (+)	
	3	Tx (-)	
	4	Rx (-)	
View on sensor			
Port 2 – Signal			
M12 female connector (D-coded)		Pin	Function
	1	Tx (+)	
	2	Rx (+)	
	3	Tx (-)	
	4	Rx (-)	
View on sensor			
Power supply			
M8 male connector		Pin	Function
	1	+12...30 VDC ($\pm 20\%$)	
	2	Not connected	
	3	DC Ground (0 V)	
	4	Not connected	
View on sensor			

Fig. 4: Connector wiring D56

FREQUENTLY ORDERED ACCESSORIES

– Additional options available in our [Accessories Catalog](#)  551444

Position magnets

			
U-magnet OD33 Part no. 251 416-2	Ring magnet OD33 Part no. 201 542-2	Ring magnet OD25.4 Part no. 400 533	Ring magnet Part no. 402 316

U-magnet OD33
Part no. 251 416-2

Material: PA ferrite GF20
Weight: Approx. 11 g
Surface pressure: Max. 40 N/mm²
Fastening torque for M4 screws: 1 Nm
Operating temperature:
-40...+105 °C (-40...+221 °F)
Marked version for sensors with internal linearization: Part no. 254 226

Ring magnet OD33
Part no. 201 542-2




Material: PA ferrite GF20
Weight: Approx. 14 g
Surface pressure: Max. 40 N/mm²
Fastening torque for M4 screws: 1 Nm
Operating temperature:
-40...+105 °C (-40...+221 °F)
Marked version for sensors with internal linearization: Part no. 253 620

Ring magnet OD25.4
Part no. 400 533

Material: PA ferrite
Weight: Approx. 10 g
Surface pressure: Max. 40 N/mm²
Operating temperature:
-40...+105 °C (-40...+221 °F)
Marked version for sensors with internal linearization: Part no. 253 621

Ring magnet
Part no. 402 316

Material: PA ferrite coated
Weight: Approx. 13 g
Surface pressure: Max. 20 N/mm²
Operating temperature:
-40...+100 °C (-40...+212 °F)

Position magnet	Magnet spacer	O-rings
		

Block magnet L
Part no. 403 448

Material: Plastic carrier with neodymium magnet
Weight: Approx. 20 g
Fastening torque for M4 screws: 1 Nm
Operating temperature:
-40...+75 °C (-40...+167 °F)

This magnet may influence the sensor performance specifications for some applications.

Magnet spacer
Part no. 400 633





Material: Aluminum
Weight: Approx. 5 g
Surface pressure: Max. 20 N/mm²
Fastening torque for M4 screws: 1 Nm


O-ring for threaded flange
M18×1.5-6g
Part no. 401 133

Material: Fluoroelastomer
Durometer: 75 ±5 Shore A
Operating temperature:
-40...+204 °C (-40...+400 °F)


O-ring for threaded flange
¾"-16 UNF-3A
Part no. 560 315

Material: Fluoroelastomer
Durometer: 75 ±5 Shore A
Operating temperature:
-40...+204 °C (-40...+400 °F)


O-ring	Mounting accessories
	
O-ring for threaded flange M22×1.5-6g Part no. 561 337	Hex jam nut M18×1.5-6g Part no. 500 018
Material: FPM Durometer: 75 Shore A Operating temperature: -20...+200 °C (-6...+392 °F)	Material: Steel, zinc plated
	
	
Hex jam nut ¾"-16 UNF-3A Part no. 500 015	Fixing clip Part no. 561 481
Material: Steel, zinc plated	Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic

Cable connectors* – Signal**M12 D-coded male connector (4 pin), straight**
Part no. 370 523


Material: Zinc nickel-plated
Termination: Insulation-displacement
Cable Ø: 6...7.2 mm (0.2...0.28 in.)
Wire: 24 AWG – 22 AWG
Operating temperature:
-25...+85 °C (-13...+185 °F)
Ingress protection: IP65 / IP67
(correctly fitted)
Fastening torque: 0.6 Nm

**M12 connector end cap**
Part no. 370 537


Female connectors M12 should be covered by this protective cap
Material: Brass nickel-plated
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.39...0.49 Nm

Cable connectors* – Power**M12 A-coded female connector (4 pin/5 pin), straight**
Part no. 370 677

Material: GD-Zn, Ni
Termination: Screw
Contact insert: CuZn
Cable Ø: 4...8 mm (0.16...0.31 in.)
Wire: max. 1.5 mm² (16 AWG)
Operating temperature:
-30...+85 °C (-22...+185 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.6 Nm

**M8 female connector (4 pin), straight**
Part no. 370 504

Material: CuZn nickel plated
Termination: Solder
Cable Ø: 3.5...5 mm (0.14...0.28 in.)
Wire: 0.25 mm²
Operating temperature:
-40...+85 °C (-40...+185 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.5 Nm

Cables**PUR signal cable**
Part no. 530 125

Material: PUR jacket; green
Features: Cat 5, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant
Cable Ø: 6.5 mm (0.26 in.)
Cross section: 2 x 2 x 0.35 mm²
(22 AWG)
Bending radius: 6 x D (fixed installation)
Operating temperature:
-20...+60 °C (-4...+140 °F)

**PVC power cable**
Part no. 530 108

Material: PVC jacket; gray
Features: Shielded, flexible, mostly flame resistant
Cable Ø: 4.9 mm (0.19 in.)
Cross section: 3 x 0.34 mm²
Bending radius: 5 x D (fixed installation)
Operating temperature:
-30...+80 °C (-22...+176 °F)

Cable sets**Signal cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight**
Part no. 530 064

Material: PUR jacket; green
Feature: Cat 5e
Cable length: 5 m (16.4 ft)
Cable Ø: 6.5 mm (0.26 in.)
Ingress protection: IP65, IP67, IP68
(correctly fitted)
Operating temperature:
-30...+70 °C (-22...+158 °F)

**Signal cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight**
Part no. 530 065

Material: PUR jacket; green
Feature: Cat 5e
Cable length: 5 m (16.4 ft)
Cable Ø: 6.5 mm (0.26 in.)
Ingress protection M12 connector:
IP67 (correctly fitted)
Ingress protection RJ45 connector:
IP20 (correctly fitted)
Operating temperature:
-30...+70 °C (-22...+158 °F)

*/ Follow the manufacturer's mounting instructions


Controlling design dimensions are in millimeters and measurements in () are in inches

Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.

Cable sets	Programming tools		
			
Power cable with M8 female connector (4 pin), straight – pigtail Part no. 530 066 (5 m (16.4 ft.)) Part no. 530 096 (10 m (32.8 ft.)) Part no. 530 093 (15 m (49.2 ft.)) Material: PUR jacket; gray Feature: Shielded Cable Ø: 5 mm (0.2 in.) Operating temperature: -40...+90 °C (-40...+194 °F)	Power cable with M12 A-coded female connector (5 pin), straight – pigtail Part no. 370 673 Material: PUR jacket; black Feature: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	TempoLink® kit for Tempsonics® R-Series V Part no. TL-1-0-EM08 (D56) Part no. TL-1-0-EM12 (D58) <ul style="list-style-type: none"> • Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool • Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m) • User friendly interface for mobile devices and desktop computers • See data sheet "TempoLink® smart assistant" (document part no.: 552070) for further information 	TempoGate® smart assistant for Tempsonics® R-Series V Part no. TG-C-0-Dxx (xx indicates the number of R-Series V sensors that can be connected (even numbers only)) <ul style="list-style-type: none"> • OPC UA server for diagnostics of the R-Series V • For installation in the control cabinet • Connection via LAN and Wi-Fi • See data sheet "TempoGate® smart assistant" document part no.: 552110 for further information

Color of connectors and cable jacket may change. Colors of the cores and technical properties remain unchanged.

ORDER CODE



a Sensor model	f Connection type
R H 5 Rod	D 5 8 2 x M12 female connectors (D-coded), 1 x M12 male connector (A-coded)
b Design	D 5 6 2 x M12 female connectors (D-coded), 1 x M8 male connector
B Base unit (only for replacement)	
J Threaded flange M22x1.5-6g (rod Ø 12.7 mm), stroke length: 25...5900 mm (1...232 in.)	
M Threaded flange M18x1.5-6g (standard)	
S Threaded flange 3/4"-16 UNF-3A (standard)	
T Threaded flange 3/4"-16 UNF-3A (with raised-face)	
c Mechanical options	g System
A Standard	1 Standard
B Bushing on rod end (only for design »M«, »S« & »T«)	
F Flexible sensing element (only for design »B«, »M«, »S« & »T«)	
M Thread M4 at rod end (only for design »M«, »S« & »T«)	
V Fluor elastomer seals for the sensor electronics housing	
d Stroke length	h Output
X X X X M 0025...7620 mm	U 4 0 2 PROFINET RT & IRT, position and velocity, linear profile (1...30 magnet(s))
Standard stroke length (mm)	Ordering steps
25... 500 mm	5 mm
500... 750 mm	10 mm
750...1000 mm	25 mm
1000...2500 mm	50 mm
2500...5000 mm	100 mm
5000...7620 mm	250 mm
X X X X U 001.0...300.0 in.	U 4 0 1 PROFINET RT & IRT, position and velocity, encoder profile (1 magnet)
Standard stroke length (in.)	Ordering steps
1... 20 in.	0.2 in.
20... 30 in.	0.4 in.
30... 40 in.	1.0 in.
40...100 in.	2.0 in.
100...200 in.	4.0 in.
200...300 in.	10.0 in.
Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.	
e Number of magnets	NOTICE
X X 01...30 position(s) (1...30 magnet(s))	<ul style="list-style-type: none"> Select the linear profile (U402 or U412) in h "Output" for multi-position measurement. Specify number of magnets for your application and order the magnets separately. The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.). Use magnets of the same type for multi-position measurement. If the option for internal linearization (U411, U412) in h "Output" is chosen, select a suitable magnet. The internal linearization (U411, U412) in h "Output" is not available with the flexible sensing element F in c "Mechanical options".
DELIVERY	
 RH5-B:	RH5-J-M-/S-/T:
<ul style="list-style-type: none"> Base unit (without flange & rod assembly) 3 x socket screws M4x59 	<ul style="list-style-type: none"> Sensor O-ring
	Accessories have to be ordered separately.
Manuals, Software & 3D Models available at:	www.tempsonics.com

GLOSSARY

E

Encoder Profile

The encoder profile corresponds to the specification of the encoder profile V4.2 (PNO no. 3.162). With this profile, the position and the velocity of one magnet can be measured and transferred simultaneously. (→ Linear Profile)

Extrapolation

The native measurement cycle time of a sensor increases with the stroke length. With extrapolation, the sensor is able to report data faster than the native cycle time, independent of the stroke length of the sensor. Without extrapolation, if data is requested faster than the native cycle time, the last measured value is repeated.

G

GSDML

The properties and functions of a PROFINET IO field device are described in a GSDML file (**General Station Description**). The XML-based GSDML file contains all relevant data that are important for the implementation of the device in the controller as well as for data exchange during operation. The GSDML file of the R-Series V PROFINET is available on the homepage www.temposonics.com.

I

Internal Linearization

The internal linearization offers an improved linearity for an overall higher accuracy of the position measurement. The internal linearization is set for the sensor during production.

IRT Filter

With PROFINET IRT (**Isochronous Real Time**) a clock-synchronous data transmission takes place. The application, the data transmission as well as the device cycle are synchronous. IRT enables a clock-synchronous data exchange with a minimum cycle time of 250 µs in the network. The R-Series V PROFINET supports PROFINET RT and IRT. (→ RT)

L

Linear Profile

The linear profile was developed by Temposonics and is tailored to the characteristics of magnetostrictive position sensors. With this profile, the positions and velocities of up to 30 magnets can be reported and transferred simultaneously. (→ Encoder Profile)

M

Multi-position measurement

During the measurement cycle, the positions of every magnet on the sensor are simultaneously reported. The velocity is continuously calculated based on these changing position values as the magnets are moved.

P

PROFINET

PROFINET (**Process Field Network**) is an Industrial Ethernet interface and is managed by the **PROFIBUS Nutzerorganisation e.V.** (PNO). The R-Series V PROFINET and its corresponding GSDML file are certified by the PNO.

R

RT

With PROFINET RT (**Real Time**) the data exchange is without clock synchronization. In this case, the application, the data transmission and the field devices operate according to their own processing cycle. The R-Series V PROFINET supports PROFINET RT and IRT. (→ IRT)



Temposonics

AN AMPHENOL COMPANY

UNITED STATES 3001 Sheldon Drive
Temposonics, LLC Cary, N.C. 27513
Americas & APAC Region Phone: +1 919 677-0100
E-mail: info.us@tempsonics.com

GERMANY Auf dem Schüffel 9
Temposonics 58513 Lüdenscheid
GmbH & Co. KG Phone: +49 2351 9587-0
EMEA Region & India E-mail: info.de@tempsonics.com

ITALY Phone: +39 030 988 3819
Branch Office E-mail: info.it@tempsonics.com

FRANCE Phone: +33 6 14 060 728
Branch Office E-mail: info.fr@tempsonics.com

UK Phone: +44 79 21 83 05 86
Branch Office E-mail: info.uk@tempsonics.com

SCANDINAVIA Phone: +46 70 29 91 281
Branch Office E-mail: info.sca@tempsonics.com

CHINA Phone: +86 21 3405 7850
Branch Office E-mail: info.cn@tempsonics.com

JAPAN Phone: +81 3 6416 1063
Branch Office E-mail: info.jp@tempsonics.com

Document Part Number:
551962 Revision C (EN) 02/2026



tempsonics.com

© 2026 Tempsonics, LLC – all rights reserved. Tempsonics, LLC and Tempsonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Tempsonics, LLC or Tempsonics GmbH & Co. KG. Detailed trademark ownership information is available at www.tempsonics.com/trademarkownership.